

Apollo 2 Series Street Light

- Beautiful appearance with superior design.
- Adopting modular design, easy to install and maintain.
- Arc-shaped module with surface self-cleaning effect.
- Optimum light distribution, high utilization of light.
- Lightning and surge protection system.




IP 66


Item No.	System Power (W)	Module Qty	Lumen Output 5000K (lm)	CCT	Driver Efficiency	Dimension(mm)
RL091080	75	2	7500	4000K	> 95%	L436xW301xH92
RL091120	115	3	11500	4000K	> 95%	L521xW301xH92
RL091160	150	4	15000	4000K	> 95%	L606xW301xH92
RL091200	190	5	19000	4000K	> 95%	L691xW301xH92
RL091240	230	6	23000	4000K	> 95%	L776xW301xH92

Ordering Information

	RL09	1080	A3	50	DB	V27	1	1
		1	2	3	4	5	6	
1 System Power		1080: 75W	1120: 115W	1160: 150W	1200: 190W	1240: 230W		
2 Light Distribution		A3						
3 Color Temp		30: 3000±300K	40: 4000±300K	50: 5000±300K				
4 Housing Color		CG: Cold Grey	SG: Silver Grey	BK: Black	DB: Dark Blue			
5 Input Voltage		A22: AC 220-240 V		V27: AC 120-277V				
6 Control Mode		0: Without	1: Timer	2: ZigBee	6: Photocell	0-10V Dim	Dali Control	PLC

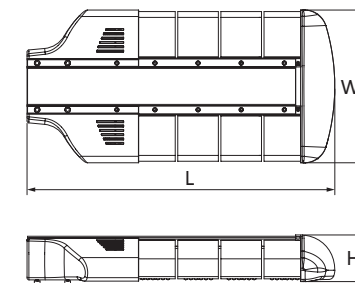

Light Distribution Curve



Luminous Intensity Unit : cd/kim
Lens Code : A3L126
Type III