



## LED Flood Light FL1D Series

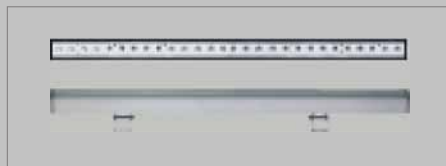

FL1D1024S735SGA2220

## LED Flood Light RL1D Series


### Product Size Unit:mm

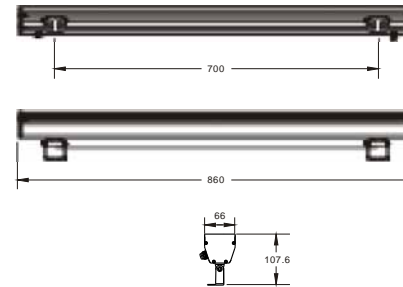


### LED Quantity

24 27 30

### Light Distribution Spare Part

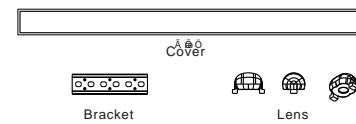

### Mounted Way

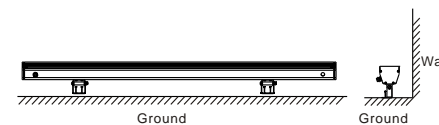

### System Parameters

Input Voltage	AC170~250V
Output Voltage	DC53V
Frequency Range	50-60Hz
Power Factor	>0.95
Total Harmonic Distortion	<15%
Power Efficiency	>88%
LED Luminous Efficiency	>90Lm/W
Lamp Efficiency	>90%
Color Temperature	4000K~5500K
Color Rendering Index	Ra>75
Junction Temperature	<75°C
Working Environment	Temperature:-40°C~50°C Humidity:10%~95%
IP Rating	IP65
Working Life	>50000hours
Lamp Body&Lampshade Material	Aluminum Alloy
Mounted Way	DMX512

### Application

Building,Bridge,Street,Lobby

### Light Distribution Curve

